

Product Specifications

Color: Black
Power: 12v/50 Watts
Accepts any MR-16 Bulb (Sold Separately)


Important Safety Warning

Surface contamination on Halogen Bulbs creates hot-spots when heated that will become weak, leaking gas and risking explosion and fire. When handling Halogen Light Bulbs, use either a clean, oil-free cloth, or a paper towel. If you do touch the bulb, clean the surface with rubbing alcohol and allow it to dry before use. For good measure, always clean new bulbs before use.



Product Parts

- 1 - Light Fixture
- 2 - Power Cord
- 3 - Halogen Bulb (Sold Separately)

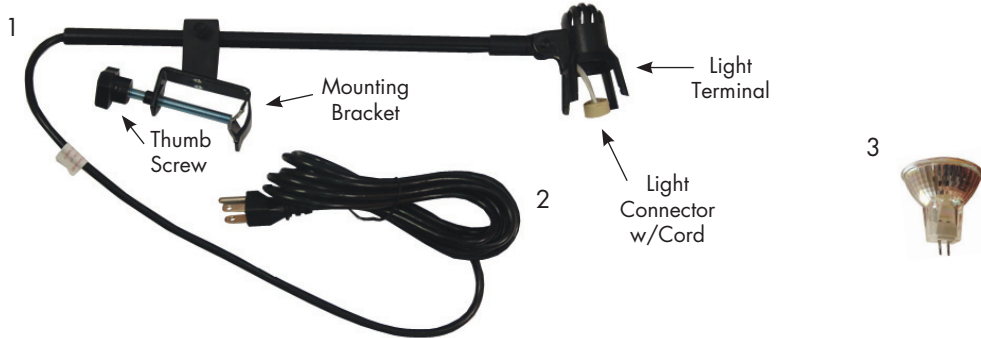

Product Set-Up

Step 1

Begin by removing all parts from the box and place on a clean, flat surface.


Firmly, but gently, insert the Halogen Bulb (3) into the Light Connector of the Light Fixture (1).



Step 2

Guide the Light Connector's Cord into the Light Terminal while pushing the Halogen Bulb (3) into it until the rim of the bulb clicks into place on the prongs of the Light Terminal.

*Clean the bulb if touched with bare hands.



Step 3

With the display already set-up, rotate the Thumb Screw on the Light Fixture (1) to open the Mounting Bracket until it is large enough to fit over the display's top bar. Slide the Mounting Bracket onto the display and tighten the Thumb Screw to secure.



Step 4

If needed, loosen the small screw on the top of the Mounting Bracket and slide the Light Fixture's (1) pole forward or backward to adjust the distance between the Halogen Bulb (3) and the banner.



Step 5

Touching only the Light Terminal, adjust the tilt of the Light Fixture (1) to direct the angle of the light towards the Banner.



Storage

Place all product parts into box and store in a cool, dry location.

Care

Clean with damp cloth and wipe dry.